


DVL

Trapezoidal Solid Double-V Profile

Material:	Volta L, Brown
Hardness:	80 A
Temp. Range:	- 40 °C to +55 °C
Certification:	FDA

Coefficient of friction :	
Steel:	0.55
Aluminum:	0.55
Rubber:	0.65

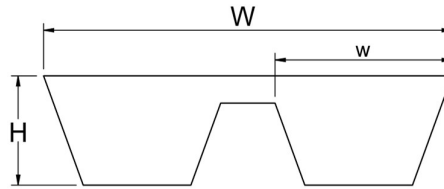

BELT TYPE	DIMENSIONS W x H inch x inch	WEIGHT lbs/ft	MIN. PULLEY Ø inch	MAX. WORK LOAD lbs	PULL FORCE (lbs) AT PRETENSION;		
					1 %	2 %	3 %
DVL-Z	1 (3/8) X 15/64	0.10	1 3/4	18	4.4	8.8	13.2
DVL-A	1 3/16 (1/2) X 5/16	0.19	2	28	7	14	21

Notes:

1. Pull Force in tables relate to grooved Steel, Aluminum and Cast Iron pulleys. Multiply given values by 0.7 for wet pulleys.
2. All values are nominal and to the best of our experience are true and accurate.