
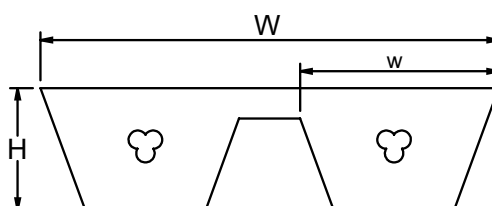


**DVLW**

**Double-V, Trapezoidal Reinforced Profile**

Material:	<b>Volta LW</b>
Color (indicative only)	<b>White 16</b> 
Hardness:	80A
Temp. Range (F°):	-40° C to + 55° C
Certification:	FDA /EU

Coefficient of friction:	
Steel:	0.55
Aluminum:	0.55
Rubber:	0.65



Product	Dimensions W x H mm X mm	Weight kg/m	Minimum Pulley Ø mm		Pull Force (kg.) at 1% Pretension	Maximum % Pretension		Drill Bit
			Butt Weld	EZOL Join		Butt	EZOL	
			DVLW-A	30 (12.7) x 8		0.24	50	

**Notes:**

1. Pull Force in tables relate to Steel and Aluminum grooved pulleys.  
Multiply given values by 0.7 for wet pulleys.
2. Dimensions have been converted from metric measurements.
3. All values are nominal and to the best of our experience are true and accurate.
4. NR = Not Recommended.