
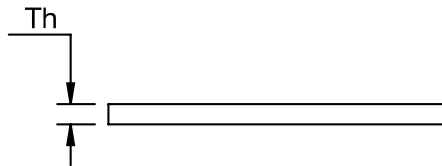


FDR V1 – MATERIAL for FABRICATIONS
Hydrolysis & Chemical Resistant
Bottom-Smooth, Top-Smooth

Material:	Volta DR-V1
Color (Indicative only)	Blue 15 
Hardness:	95A
Temp. Range (C°):	-30°C to 70°C
Temp. Range (F°):	-20°F to 158°F
Certification:	FDA/EU Approved

Coefficient of friction (Dry):	
Steel:	0.55
Stainless Steel:	0.55
UHMW:	0.28



Product:	FDR-2 V1	FDR-4 V1	FDR-6 V1	FDR-8 V1
Belt Thickness (mm)	2	4	6	8
Belt Weight (kg/ m²):	2.42	4.8	7.26	9.68
Belt Weight (lb/ ft²):	0.49	0.98	1.49	1.98

- English dimensions have been converted from Metric measurements.
- All values are nominated and to the best of our experience are true and accurate.