
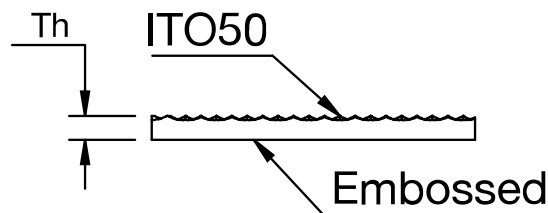


**FEDR - ITO50 V1– MATERIAL for FABRICATIONS**  
**Hydrolysis & Chemical Resistant**  
**Bottom-Embossed, Top- ITO50 (Impression Top Oval)**

Material:	<b>Volta DR-V1</b>	
Color (Indicative only)	<b>Blue 15</b>	
Hardness:	95A	
Temp. Range (C°):	-30°C to 70°C	
Temp. Range (F°):	-20°F to 158°F	
Certification:	FDA/EU Approved	

Coefficient of friction (Dry)Embossed bottom:	
Steel:	0.38
Stainless Steel:	0.38
UHMW:	0.22



Product:	FEDR-2-ITO50 V1	FEDR-5-ITO50 V1
<b>Belt Thickness (mm)</b>	2	5
<b>Belt Weight (kg/ m<sup>2</sup>):</b>	2.1	5.02
<b>Belt Weight (lb/ ft<sup>2</sup>):</b>	0.43	1.03

- English dimensions have been converted from Metric measurements.
- All values are nominated and to the best of our experience are true and accurate.