
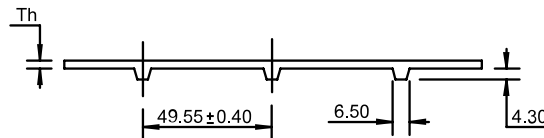


FMB-DD-MD (Metal Detectable)
DualDrive™, Bottom- Smooth, Top-Smooth

Material:	Volta MB-MD	
Color (Indicative only)	Blue 09	
Hardness:	53D	
Temp. Range (C°):	-20°C to 60°C	
Temp. Range (F°):	-5°F to 140°F	
Certification:	FDA/ EU Approved	

Coefficient of friction (Dry):	
Steel:	0.5
Stainless Steel:	0.5
UHMW:	0.28



Product:	FMB-3-DD-MD
Belt Thickness:	3mm
Belt Weight (kg/ m²):	4.80kg/m ²
Belt Weight (lb/ ft²):	0.98lb/ft ²
Belt Min Pulley Diameter (mm) (Normal Flex)	100mm
Belt Min Pulley Diameter (mm) (Back Flex)	110mm
Belt Min Pulley Diameter (Inch) (Normal Flex)	4"
Belt Min Pulley Diameter (Inch) (Back Flex)	4.33"
Max Pull Force (kg/cm width)	6
Max Pull Force (lb/inch width)	33.60

- English dimensions have been converted from Metric measurements.
- All values are nominated and to the best of our experience are true and accurate.
- For endless welding use the Volta FBW welding system.

Disclaimer: Volta Belting Ltd. recommends testing all the products in your environment to ascertain suitability. The information is supplied in good faith without warranty.