




Flat Sidewall - FSW

Flat Sidewall for Fabricated Flat Belts

Material & Color (color-indicative only):	Volta MB	Blue 
Material & Color (color-indicative only):	Volta MW	Beige 
Hardness:	95A/46D	
Sidewall Thickness:	4mm	
Sidewall Height:	40 – 80mm	
Add to Base Belt MPD:	70mm / 2.75"	
Temp. Range:	- 5°C to 60°C / 23°F to 140°F	
Certification:	FDA / USDA / EU	

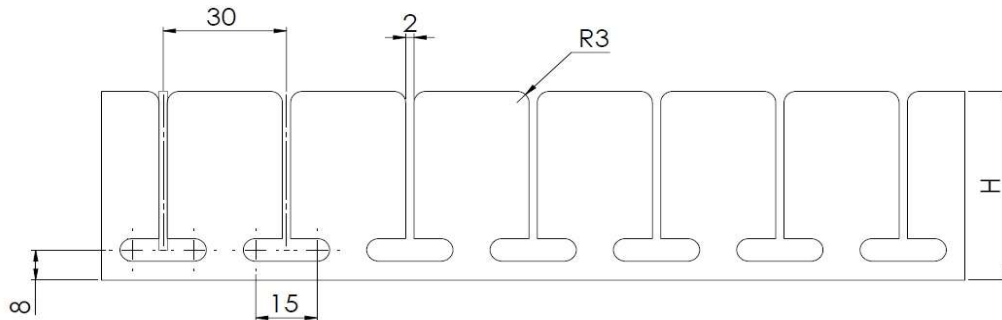

Remarks:

1. MPD (minimum pulley diameter) relates to flat sidewall applied with the HF technique.
2. No back flex is possible.
3. Flat Sidewall can be applied at a minimum distance of 5mm from the belt edges.