


VOLTA MULTIGRIP

Flat, Solid, High Grip Textured Coating

Material:	Volta ST, Green
Hardness:	65 A
Temp. Range:	- 40°C to 55°C / -40°F to 130°F
Coefficient of Friction:	Steel : 0.88
Compatibility:	Volta FMW, FRMW, FMB, FZ, FRG, FRGZ, FL, FRL, FELW, FRLW

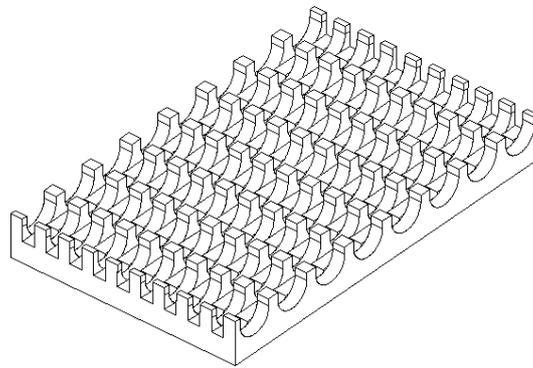

TYPE		MST - 6
		
Thickness	mm	6
Standard Width	mm	50
Weight (50 mm Width)	kg/m	0.19

Note : When M.G. is welded on a profile or flat belt there is no increase in the minimum pulley.