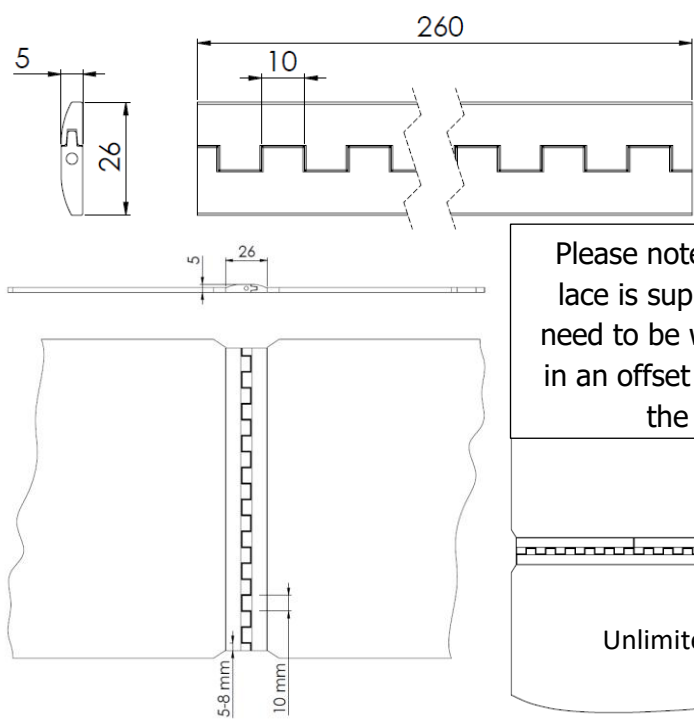


RoundFlex™ Lace - LMB-R , LMW-R, LMD-R, LDR-R V1

The RoundFlex™ Lace is a connector that allows you to easily open the belt by taking out the pin, clean or service the conveyor, reinstall the belt and close the lace with a new pin. Volta belts are renowned for their hygienic and homogeneous characteristics and therefore, do not require opening and closing on a regular basis – unlike modular belts.

- We recommend using the lace only when absolutely necessary.
- When using RoundFlex™ Lace, make sure that the conveyor pulleys fully support the belt the entire surface of the belt or at least 80% of the surface.
- Check that the pull force of the belt is less than the allowed pull force for the lace.

Material & Color:	Volta Blue (MB), Blue 02, Beige (MW), Blue 09 (MB-MD) and Blue 15 (DR -V1)
Working Range:	Suitable for belt thickness 2.5 – 5 mm
Hardness:	95A
Description:	Flat Toothed Strip
Temp. Range:	-20°C to 60°C / -5°F to 140°F
Certification:	FDA / USDA / EU
 <p>Please note that the RoundFlex™ lace is supplied in sections which need to be welded on the belt ends in an offset pattern, as indicated in the drawing below.</p> <p>Unlimited integrated length</p>	
Dimensions:	5 x 26mm (0.2" x 1.02")
One Section Length (L):	260mm (10.23")
Max. Pull Force:	3kg/cm (16.8lb/in)
Minimum Pulley Diameter	<i>Choose the highest MPD between the belt and the lace</i>
Normal Flex:	80mm (3.15")
Back Flex:	80mm (3.15")
Pin Options:	NYLOSTEEL PIN - 2.4mm
	* PLASTIC PIN - FDA approved - 2.4mm

*Maximum Pull Force with the Plastic Pin is 2 kg/cm (11.2 lb/inch).