


VPFS

Trapezoidal Reinforced Profile

Material:	Volta PF, Beige
Hardness:	88A / 37D
Temp. Range:	- 30°C to +60°C
Certifications:	FDA/EU

Coefficient of friction :	
Steel:	0.38
Aluminum:	0.38

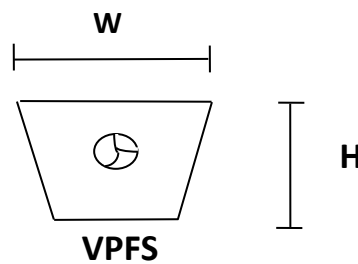

BELT TYPE	DIMENSIONS W x H mm X mm	WEIGHT kg/m	MIN. PULLEY Ø mm	MAX. WORK LOAD kg	PULL FORCE (kg) AT PRETENSION			DRILL BIT
					1.0 %	1.5 %	2.0 %	
VPFS-13/A	13 x 8.6	0.11	92	45	28	42	NR	I
VPFS-17/B	17 x 11.4	0.20	118	76	43	65	NR	II
VPFS-22/C	22 x 14.5	0.30	150	127	49	74	98	III

Notes


1. Pull Force in tables relate to Steel and Aluminum grooved pulleys. Multiply given values by 0.7 for wet pulleys.
2. All values are nominal and to the best of our experience are true and accurate.
3. NR = Not Recommended

VPFS

Trapezoidal Reinforced Profile

Material:	Volta PF, Beige
Hardness:	88A / 37D
Temp. Range:	- 20°F to +140°F
Certifications:	FDA/EU

Coefficient of friction :	
Steel:	0.38
Aluminum:	0.38



BELT TYPE	DIMENSIONS W x H inch X inch	WEIGHT lbs/ft	MIN. PULLEY Ø inch	MAX. WORK LOAD lbs	PULL FORCE (lb) AT PRETENSION			DRILL BIT
					1.0 %	1.5 %	2.0 %	
VPFS-13/A	1/2 x 5/16	0.07	3 1/4	99	61.5	92.5	NR	I
VPFS-17/B	5/8 x 7/16	0.12	4 5/8	167	94.5	143	NR	II
VPFS-22/C	7/8 x 35/64	0.19	5 3/4	280	107.8	163	215.5	III

Notes

1. Pull Force in tables relate to Steel and Aluminum grooved pulleys.
Multiply given values by 0.7 for wet pulleys.
2. Dimensions have been converted from metric measurements.
3. All values are nominal and to the best of our experience are true and accurate.
4. NR = Not Recommended.