
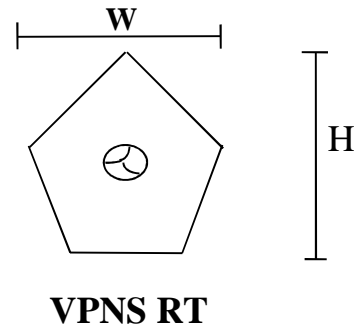


**VPNS** Trapezoidal Reinforced Profile

Material:	<b>Volta PN, Green</b>
Hardness:	88A / 37D
Temp. Range:	- 30°Cto +60°F

Coefficient of friction :	
Steel:	0.38
Aluminum:	0.38

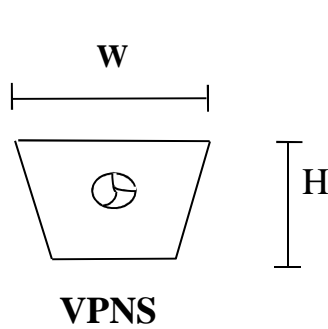

BELT TYPE	DIMENSIONS W x H mm X mm	WEIGHT kg/m	MIN. PULLEY Ø mm	MAX. WORK LOAD kg	PULL FORCE (kg) AT PRETENSION			DRILL BIT
					1.0 %	1.5 %	2.0 %	
VPNS-13/A	13 x 8.6	0.11	92	45	28	42	NR	I
VPNS-17/B	17 x 11.4	0.20	118	76	43	65	NR	II
VPNS-22/C	22 x 14.5	0.30	150	127	49	74	98	III
VPNS-13/A-RT	13 x 16	0.16	160	60	24	48	NR	I
VPNS-17/B-RT	17 x 19.5	0.26	205	115	46	69	92	II
VPNS-22/C-RT	22 x 24.5	0.44	258	191	52	78	104	III

**Notes:**

1. Pull Force in tables relate to Steel and Aluminum grooved pulleys. Multiply given values by 0.7 for wet pulleys.
2. All values are nominal and to the best of our experience are true and accurate.
3. NR = Not Recommended