
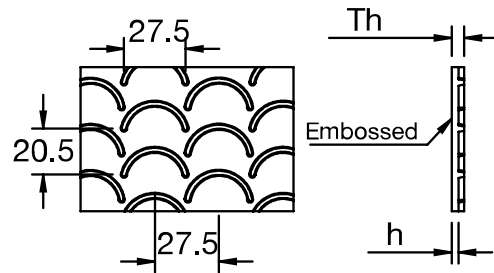


FEMW-CT

Flat Belt, Bottom-Embossed, Top-CT (Crescent Top)

Material:	Volta MW	
Color (Indicative only)	Beige	
Hardness:	95A/46D	
Temp. Range (C°):	-30°C to 70°C	
Temp. Range (F°):	-20°F to 158°F	
Certification:	FDA/ USDA/USDA Dairy/EU Approved	

Coefficient of friction (Dry):	
Belt Embossed Bottom -Steel:	0.25



Product:	FEMW-2.5-CT	
Belt Thickness (mm)	2.5	
Belt Weight (kg/ m²):	3.5	
Belt Weight (lb/ ft²):	0.7	
Belt Min Pulley Diameter (mm)-Normal Flex	50	
Belt Min Pulley Diameter (mm)-Back Flex		
Belt Min Pulley Diameter (Inch)-Normal Flex	2	
Belt Min Pulley Diameter (Inch)-Back Flex		
Max. Workload (Kg/cm)	10	
Max. Workload (lb/inch)	56	
Pull Force* (kg/cm width) at pretension of:	0.5%	0.5
	1%	1
	1.5%	1.5
	2%	2
	3%	3
Pull Force* (lb/inch width) at pretension of:	0.5%	2.8
	1%	5.6
	1.5%	8.4
	2%	11.2
	3%	16.8
Electrode Splicing	EVMW 7	✓
	EVMW 9	✓

- *Pull force – According to “Temperature Correction Factor”.

Belt material	Temperature Correction Factor						
	40°C/ 104°F	45°C/ 113°F	50°C/ 122°F	55°C/ 131°F	60°C/ 140°F	65°C/ 149°F	70°C/ 158°F
MW– 95A/46D Shore	1	0.98	0.95	0.9	0.87	0.8	0.7

- Pull Force relates to Steel pulleys. Multiply given values by 0.9 for Cast Iron, 1.1 for Rubber and 0.8 for wet smooth drums.
- English dimensions have been converted from Metric measurements.
- All values are nominated and to the best of our experience are true and accurate.