


**VPZS** Trapezoidal Reinforced Profile

Material:	<b>Volta PZ, Dark Green</b>
Hardness:	86A / 35D
Temp. Range:	-20°C to +50°C

Coefficient of friction :	
Steel:	0.40
Aluminum:	0.40

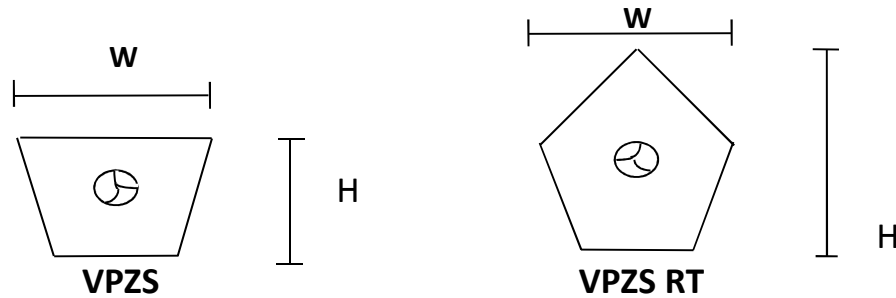

BELT TYPE	DIMENSIONS W x H mm X mm	WEIGHT kg/m	MIN. PULLEY Ø mm	MAX. WORK LOAD kg	PULL FORCE (kg) AT PRETENSION			DRILL BIT
					1.0 %	1.5 %	2.0 %	
VPZS-13/A	13 x 8.6	0.11	88	41	26	39	NR	I
VPZS-17/B	17 x 11.4	0.20	112	69	39	58.5	NR	II
VPZS-22/C	22 x 14.5	0.30	142	116	44	66	88	III
VPZS-13/A-RT	13 x 16	0.16	152	55	21.6	32.4	43.2	I
VPZS-17/B-RT	17 x 19.5	0.26	195	108	41.4	62.1	82.8	II
VPZS-22/C-RT	22 x 24.5	0.44	245	175	47	70.5	94	III

Notes

1. Pull Force in tables relate to Steel and Aluminum grooved pulleys. Multiply given values by 0.7 for wet pulleys.
2. All values are nominal and to the best of our experience are true and accurate.
3. NR = Not Recommended.